

FILE COPY

(2)



TECHNICAL REPORT
NATICK/TR-90/022

AD _____

OBSERVATIONS OF REAL-TIME DYNAMIC CHANGES TO FOOD MICROSTRUCTURE USING THE ENVIRONMENTAL SCANNING ELECTRON MICROSCOPE (ESEM)

AD-A223 466

DTIC
ELECTE
JUN 27 1990

D

D

BY

SAMUEL H. COHEN
RICHARD J. HARNIMAN*
ROBYN RUFNER +

MAY 1990
FINAL REPORT
OCTOBER 1986 - SEPTEMBER 1988

APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED.

UNITED STATES ARMY NATICK
RESEARCH, DEVELOPMENT AND ENGINEERING CENTER
NATICK, MA 01760-5000

*ELECTROSCAN CORPORATION, WILMINGTON, MA 01887
+WEST PEABODY, MA 01968
SOLDIER SCIENCE DIRECTORATE

BEST
AVAILABLE COPY

90 06 25 004

DISCLAIMERS

The findings contained in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

Citation of trade names in this report does not constitute an official endorsement or approval of the use of such items.

DESTRUCTION NOTICE

For Classified Documents:

Follow the procedures in DoD 5200.22-M, Industrial Security Manual, Section II-19 or DoD 5200.1-R, Information Security Program Regulation, Chapter IX.

For Unclassified/Limited Distribution Documents:

Destroy by any method that prevents disclosure of contents or reconstruction of the document.

REPORT DOCUMENTATION PAGE			Form Approved OMB No 0704-0188	
<small>Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.</small>				
1. AGENCY USE ONLY (Leave blank)	2. REPORT DATE May 1990	3. REPORT TYPE AND DATES COVERED FINAL October 1986 - September 1988		
4. TITLE AND SUBTITLE (U) Observations of Real-Time Dynamic Changes to Food Microstructure Using the Environmental Scanning Electron Microscope		5. FUNDING NUMBERS Program Element No.: 1L161102 Project No.: AH52 ✓ Task No.: 03 Work Unit Accession No.: DA309672		
6. AUTHOR(S) Samuel Cohen, Richard Harniman and Robyn Rufner		8. PERFORMING ORGANIZATION REPORT NUMBER NATICK/TR-90/022		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army Natick Research, Development and Engineering Ctr Kansas Street ATTN: STRNC-YSP Natick, Massachusetts 01760-5020		10. SPONSORING/MONITORING AGENCY REPORT NUMBER		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)		11. SUPPLEMENTARY NOTES Authors Addresses: Richard Harniman, Electrosan Corp., 66 Concord Street, Wilmington, MA 01887; Robyn Rufner, 503 Foxwood Circle, W. Peabody, MA 01968		
12a. DISTRIBUTION/AVAILABILITY STATEMENT Approved for Public Release Distribution Unlimited		12b. DISTRIBUTION CODE		
13. ABSTRACT (Maximum 200 words) In this report we describe the first use of the production model environmental scanning electron microscope (ESEM) to observe dynamic morphological changes in fresh tomato and celery. The use of an Environmental SEM eliminated the need for time consuming preparative methods such as fixation, freeze drying, etc. Use of this type of microscope should prove helpful in studying dynamic changes to both food and nonfood items at the high resolution and high magnification obtained by a SEM.				
14. SUBJECT TERMS VEGETABLES, FOOD MICROSTRUCTURE, SCANNING ELECTRON MICROSCOPE, SEM, ENVIRONMENT, TEMPERATURE, PRESSURE, VISUALIZATION, ESEM		15. NUMBER OF PAGES 16		
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED		16. PRICE CODE		
18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UNLIMITED		

GENERAL INSTRUCTIONS FOR COMPLETING SF 298

The Report Documentation Page (RDP) is used in announcing and cataloging reports. It is important that this information be consistent with the rest of the report, particularly the cover and title page. Instructions for filling in each block of the form follow. It is important to **stay within the lines** to meet optical scanning requirements.

Block 1. Agency Use Only (Leave blank).

Block 2. Report Date Full publication date including day, month, and year, if available (e.g. 1 Jan 88). Must cite at least the year.

Block 3. Type of Report and Dates Covered. State whether report is interim, final, etc. If applicable, enter inclusive report dates (e.g. 10 Jun 87 - 30 Jun 88).

Block 4. Title and Subtitle. A title is taken from the part of the report that provides the most meaningful and complete information. When a report is prepared in more than one volume, repeat the primary title, add volume number, and include subtitle for the specific volume. On classified documents enter the title classification in parentheses.

Block 5. Funding Numbers To include contract and grant numbers; may include program element number(s), project number(s), task number(s), and work unit number(s). Use the following labels:

C - Contract	PR - Project
G - Grant	TA - Task
PE - Program Element	WU - Work Unit Accession No

Block 6. Author(s) Name(s) of person(s) responsible for writing the report, performing the research, or credited with the content of the report. If editor or compiler, this should follow the name(s).

Block 7. Performing Organization Name(s) and Address(es). Self-explanatory.

Block 8. Performing Organization Report Number. Enter the unique alphanumeric report number(s) assigned by the organization performing the report.

Block 9. Sponsoring/Monitoring Agency Name(s) and Address(es). Self-explanatory.

Block 10. Sponsoring/Monitoring Agency Report Number (If known)

Block 11. Supplementary Notes. Enter information not included elsewhere such as: Prepared in cooperation with ...; Trans. of ...; To be published in ... When a report is revised, include a statement whether the new report supersedes or supplements the older report.

Block 12a. Distribution/Availability Statement. Denotes public availability or limitations. Cite any availability to the public. Enter additional limitations or special markings in all capitals (e.g. NOFORN, REL, ITAR).

DOD - See DoDD S230.24, "Distribution Statements on Technical Documents."
DOE - See authorities.
NASA - See Handbook NHB 2200.2.
NTIS - Leave blank.

Block 12b. Distribution Code.

DOD - Leave blank.
DOE - Enter DOE distribution categories from the Standard Distribution for Unclassified Scientific and Technical Reports.
NASA - Leave blank.
NTIS - Leave blank.

Block 13. Abstract Include a brief (Maximum 200 words) factual summary of the most significant information contained in the report.

Block 14. Subject Terms. Keywords or phrases identifying major subjects in the report.

Block 15. Number of Pages. Enter the total number of pages.

Block 16. Price Code Enter appropriate price code (NTIS only).

Blocks 17. - 19. Security Classifications. Self-explanatory. Enter U.S. Security Classification in accordance with U.S. Security Regulations (i.e., UNCLASSIFIED). If form contains classified information, stamp classification on the top and bottom of the page.

Block 20. Limitation of Abstract. This block must be completed to assign a limitation to the abstract. Enter either UL (unlimited) or SAR (same as report). An entry in this block is necessary if the abstract is to be limited. If blank, the abstract is assumed to be unlimited.

SUMMARY

An environmental scanning electron microscope (ESEM) was used for the first time to observe and videotape real-time dynamic changes to the microstructure of fresh, wet untreated tomato and celery tissues. No sample preparation methods such as dehydration, freezing, critical point or freeze-drying were necessary for charge-free visualization at from 15 to 25 kV. Since the specimen chamber allows for control of the chemical and/or physical states of the specimens, it is possible to keep each sample wet and to observe cell shrinkage and distortion as the chamber pressure is reduced. The consequence of pressure reduction to fresh vegetable cells and comparisons with freeze-dried vegetables is discussed. The experimental results demonstrate that the capability for altering a food sample's environment (temperature, pressure, gas or chemical) within the ESEM offers many possibilities in the study of food microstructure and is a significant improvement over conventional scanning electron microscopes.



iii

Accession For	
NTIS CRA&I	<input checked="checked" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By	
Distribution /	
Availability Codes	
Dist	Avail and/or Special
A-1	

TABLE OF CONTENTS

	<u>PAGE</u>
SUMMARY	iii
LIST OF FIGURES	vi
PREFACE	vii
INTRODUCTION	1
MATERIALS AND METHODS	3
RESULTS AND DISCUSSION	4
CONCLUSIONS	8
REFERENCES	9

LIST OF FIGURES

Fig. 1A. Celery cells 1 min after insertion into ESEM. Photo taken from T.V. screen. Bar = 50 μ m	5
Fig. 2A. Tomato cells 1 min after insertion into ESEM. Photo taken from T.V. screen. Bar = 50 μ m	6
Fig. 1B. Celery cells 30 min after insertion into ESEM. Photo taken from T.V. screen. Bar = 50 μ m	5
Fig. 2B. Tomato cells 10 min after insertion into ESEM. Photo taken from T.V. screen. Bar = 50 μ m	6
Fig. 1C. Celery cells 1 h 26 min after insertion into ESEM. Photo taken from T.V. screen. Bar = 50 μ m	5
Fig. 2C. Tomato cells 20 min after insertion into ESEM. Photo taken from T.V. Bar = 50 μ m	6
Fig. 3. SEM micrograph of freeze dried celery cells.	7
Fig. 4. SEM micrograph of freeze dried tomato cells.	7

PREFACE

This project on the first use of the environmental scanning electron microscope (ESEM) at Natick was undertaken during the period October 1986 to September 1988. The work was funded under Program Element No. 1L161102, Project No. AH52, Task No. 03, and Work Unit Accession No. DA309672.

The authors thank Dr. Charles A. Voyle for reading this paper at the Food Microstructure Symposium in Reading, U.K., in September 1988.

OBSERVATIONS OF REAL-TIME DYNAMIC CHANGES TO FOOD MICROSTRUCTURE
USING THE ENVIRONMENTAL SCANNING ELECTRON MICROSCOPE (ESEM)

INTRODUCTION

In the study of biological microstructure, interpretation of results should be made with consideration given to preparative methods (Lewis, 1986). For example, cell volume is greatly affected by sample preparation and cell structure can be altered by processing differences (Heathcock and Chapman, 1983), such as variations in fixation and post-fixation techniques (Irving and Becker, 1985). The occurrence of artifacts, which are a consequence of most preparative techniques, must be minimized to assure proper sample evaluation (Flint, 1982).

Problems encountered by food scientists in sample preparation for microscopy are similar to those generally encountered by biologists, namely: fixation and dehydration methods produce structural changes, including distortion and shrinkage (Chabot, 1979). The best way to overcome these problems is to eliminate dehydration and retain the sample's natural state (Robinson, 1978). This has recently been accomplished with a newly developed environmental scanning electron microscope (ESEM). By use of the ESEM's vacuum gradients, scientists can examine charge-free, wet and uncoated nonconductive samples (Harniman, 1988).

Technologies upon which this microscope are based include: 1) a specimen chamber with which samples can be examined in a saturated H₂O vapor environment (Danilatos and Robinson, 1979); 2) a scanning electron microscope, which permits visualization of samples at atmospheric pressure (Danilatos, 1980); and 3) a differential pumping system, which permits live and wet specimens to be examined at pressures up to 6 kPa (Danilatos, 1981, 1988).

The ESEM is a scanning electron microscope that can operate at a range of pressures from the typically low pressure of a standard SEM to pressures at which H₂O can be observed (Danilatos, 1988). In other words, the ESEM has a region within the electron column where the vacuum is optimum for generating and focusing the electron beam at pressures less than 1.3×10^{-4} Pa and another region (the specimen chamber) where the pressure can exceed 2.6 kPa. These two regions are separated by two apertures, which effectively limit pressure build-up in the column. By using pressure-limiting apertures, the desired specimen chamber pressure is maintained and specimen transfer is facilitated.

As the electron beam passes into the specimen chamber it diffuses after collision with gas molecules; however, if a detector is positioned close enough to the sample, detection of the emerging signal will occur. Parameters such as resolution and magnification are basically the same as a standard SEM (Baumgarten, 1989); however, if the sample within the ESEM is completely covered with H₂O, the resulting secondary electron image will be very low in contrast (Robinson, 1978). An additional significant capability of the ESEM is that dynamic surface microstructural changes can be videotaped so that these real-time changes can be studied at a later date.

In this report we describe preliminary experiments using for the first time the production model environmental scanning electron microscope to observe dynamic changes to the microstructure of fresh, wet, untreated, uncoated vegetable tissues.

MATERIALS AND METHODS

For comparative purposes, both fresh and freeze-dried vegetables (celery and tomato) were evaluated.

Fresh vegetables obtained from a local market were cut into 1 cm^3 cubes and placed into the cylindrical well (2.5 cm in diameter and 2.5 cm deep) of a specially fabricated SEM stub. In addition to saturating the specimen chamber of the ESEM with H_2O vapor to 100% relative humidity via a reservoir chamber, the well contained H_2O , which helped keep the sample moist.

The initial pressure within the ESEM specimen chamber of 2.66 kPa (19.9 torr) H_2O vapor was gradually reduced over a period of time via a computerized differential pumping system to 10.6 Pa (1 h 33 min) for celery, and from 2.85 kPa to 2.66×10^2 Pa (2 h 3 min) for tomato. The dynamic sequence of events occurring to the microstructure, especially the cell walls, of each of the vegetables was recorded on videotape and still photographs were made from TV screen images.

Freeze-dried celery and tomato were cut into 1 cm^3 cubes, affixed to the surface of SEM stubs with silver paste, sputter coated with 15 nm of AuPd and examined with a Zeiss CSM 950 SEM at 20 kV (the ESEM was operated at either 20 kV or 15 kV). Photographs were taken using Polaroid type 52 film.

RESULTS AND DISCUSSION

Photographs of celery and tomato taken within 1 min of insertion into the specimen chamber of the ESEM whose vapor pressure was 2.7 kPa can be seen in Figs. 1A and 2A. As the pressure within the chamber was reduced to $8.6 \times 10^2\text{ Pa}$ in 30 min, some shrinkage and distortion occurred to the celery cell walls (Fig. 1B) and similar changes occurred to the tomato (Fig. 2B). After 30 min at $2.0 \times 10^2\text{ Pa}$ pressure, the tomato cell walls collapsed (Fig. 2C); however, because of the natural rigidity of celery, collapse of the cell walls (Fig. 1C) took longer (1 h 26 min at $1.1 \times 10^2\text{ Pa}$) to occur than with the tomato.

Cell walls of both the celery (Fig. 3) and tomato (Fig. 4) appear well defined and typical of freeze-dried vegetable cell walls. Since these samples have been dehydrated and coated with AuPd, to relate their microstructure to those of Figs. 1A and 2A, which contain H_2O , would be misleading. The gross appearance in Figs. 3 and 4, more closely resembles Figs. 1B and 2B whose cell walls have undergone some dimensional changes due to reduction in chamber pressure and subsequent shrinkage due to diminished H_2O content.

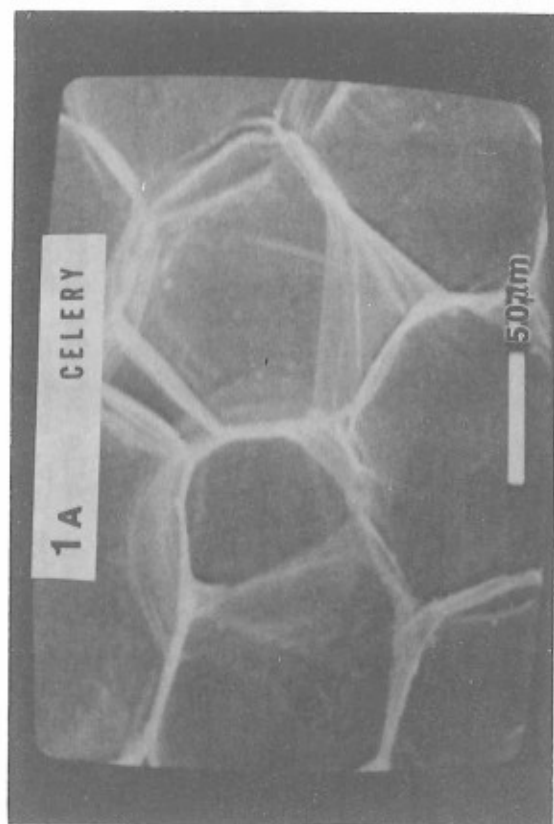


Fig. 1A. Celery cells 1 min after insertion into ESEM.
Photo taken from T.V. screen. Bar = 50 μ m

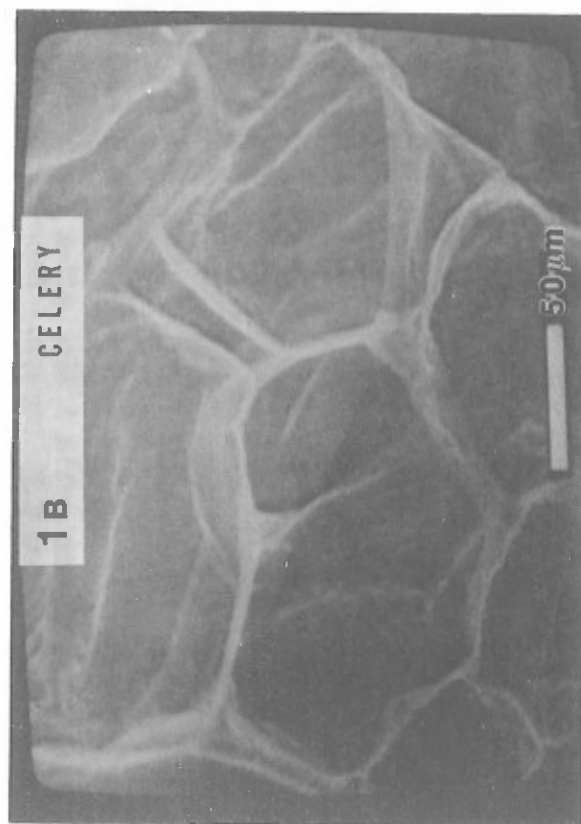


Fig. 1B. Celery cells 30 min after insertion into ESEM.
Photo taken from T.V. screen. Bar = 50 μ m

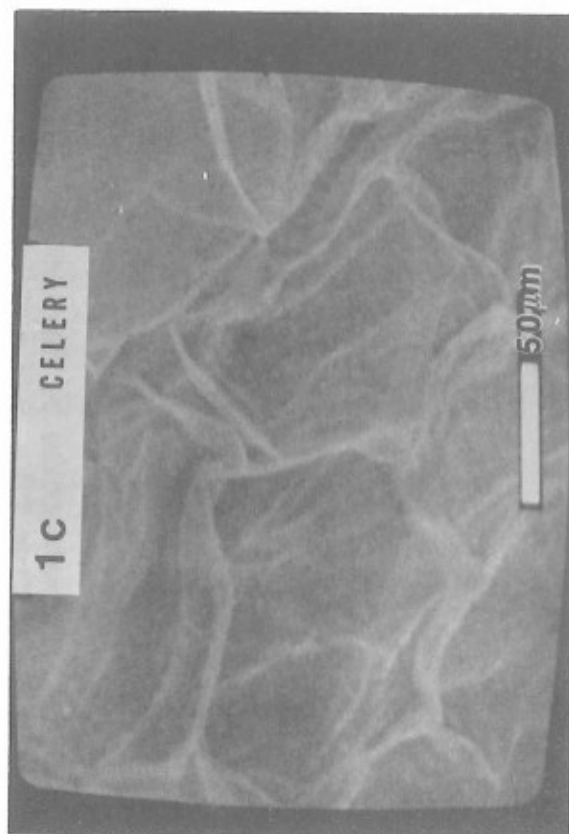


Fig. 1C. Celery cells 1 h 26 min after insertion into ESEM.
Photo taken from T.V. screen. Bar = 50 μ m

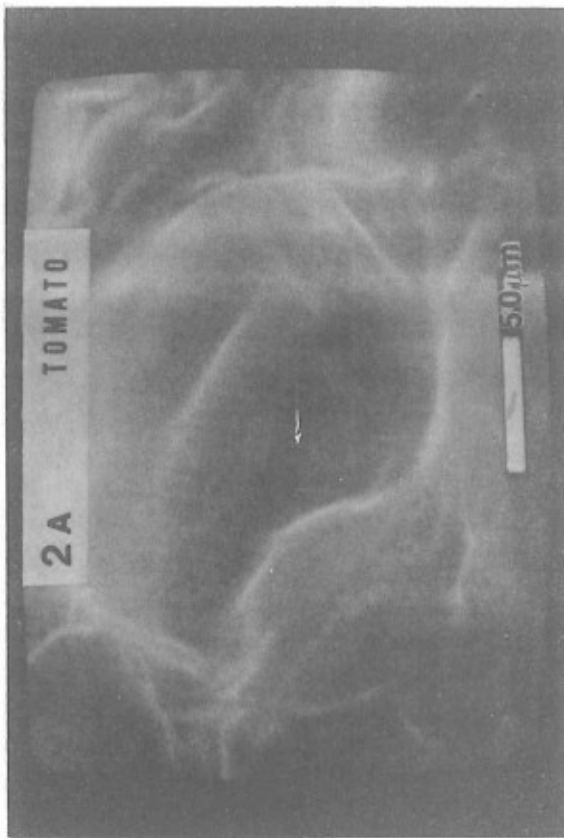


Fig. 2A. Tomato cells 1 min after insertion into ESEM.
Photo taken from T.V. screen. Bar = 50 μ m

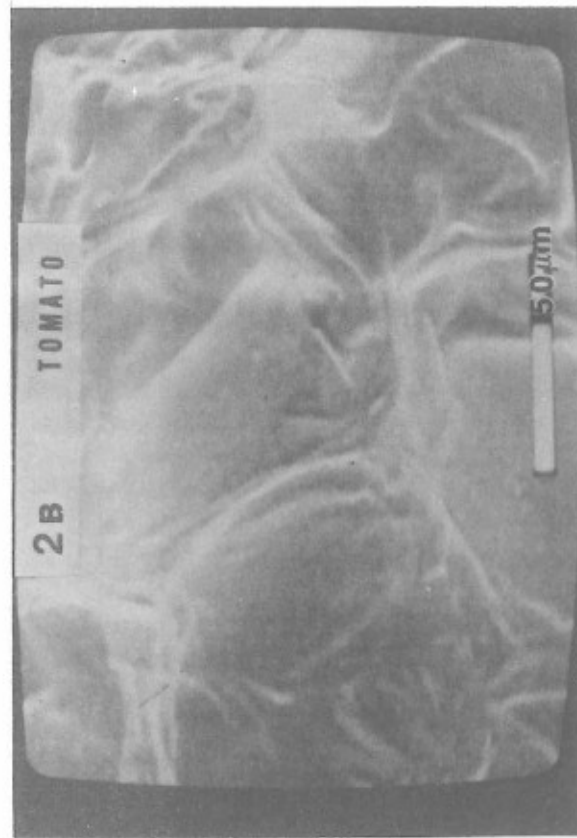


Fig. 2B. Tomato cells 10 min after insertion into ESEM.
Photo taken from T.V. screen. Bar = 50 μ m

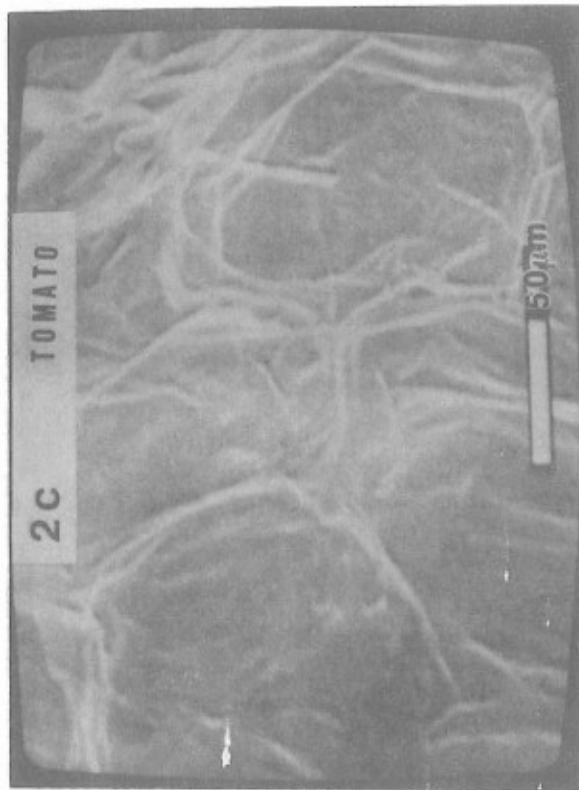


Fig. 2C. Tomato cells 20 min after insertion into ESEM.
Photo taken from T.V. Bar = 50 μ m

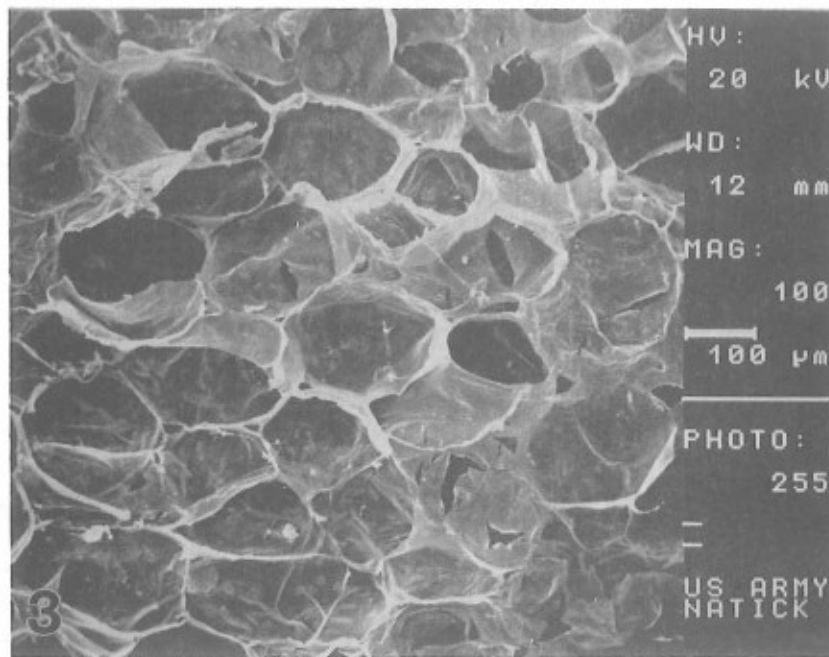


Fig. 3. SEM micrograph of freeze dried celery cells.

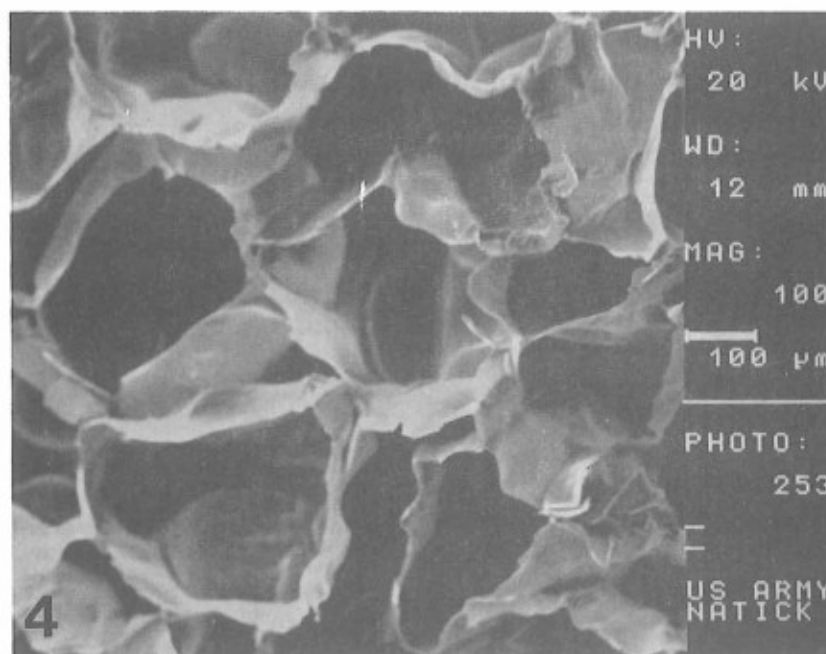


Fig. 4. SEM micrograph of freeze dried tomato cells.

CONCLUSIONS

The environmental scanning electron microscope is a very useful tool in the study of food microstructure because no sample preparation is needed and microstructural changes can be observed in real-time. The preliminary findings presented here demonstrate that the capability for altering a sample's environment within the ESEM is a significant improvement over conventional scanning electron microscopes.

The potential uses of the ESEM should benefit not only food ration research, but research in such areas as chemistry and materials science. Work is currently in progress to study the diffusion of metal ions in polymeric films.

This document reports research undertaken at the US Army Natick Research, Development and Engineering Center and has been assigned No. NATICK/TR-401022 in the series of reports approved for publication.

REFERENCES

1. BAUMGARTEN, N. 1989. Environmental SEM premieres. *Nature*. 341: 81-82.
2. CHABOT, JF. 1979. Preparation of food science samples for SEM. *SEM/III*: 279-286, 298.
3. DANILATOS, GD, ROBINSON, VNE. 1979. Principles of scanning electron microscopy at high specimen chamber pressures. *Scanning*. 2:72-82.
4. DANILATOS, GD. 1980. An atmospheric scanning electron microscope (ASEM). *Scanning*. 3:215-217.
5. DANILATOS, GD. 1981. The examination of fresh or living plant material in an environmental scanning electron microscope. *J. of Microscopy* 121:235-238.
6. DANILATOS, GD. 1988. Foundations of environmental scanning electron microscopy. *Advanc. Electron. Electron. Phys.* 71:109-250.
7. FLINT, FO. 1982. Light microscopy preparation techniques for starch and lipid containing snack foods. *Food Microstr.* 1:145-150.
8. HARNIMAN, R. 1988. ESEM uses vacuum gradients to examine wet and uncoated nonconductive samples. *Research and Development Magazine*. 30:112-114, 116.
9. HEATHCOCK, JF, CHAMPMAN, JA. 1983. The structure of fresh and desiccated coconut. *Food Microstr.* 2:81-90.
10. IRVING, DW, BECKER, R. 1985. Seed structure and composition of potential new crops. *Food Microstr.* 4:43-53.
11. LEWIS, DF. 1986. Features of food microscopy. *Food Microstr.* 5:1-18.
12. ROBINSON, VNE. 1978. The SEM examination of wet specimens. *Scanning*. 1:149-156.